




## RTM2612

- 7 test parameters.
- 0.01 high resolution.
- Able to measure Surface Temperature.
- Large LCD can display three values simultaneously.

Widely used in spraying industry, workshops, warehouses, libraries, offices, computer rooms, laboratories and other environmental temperature and humidity monitoring occasions.

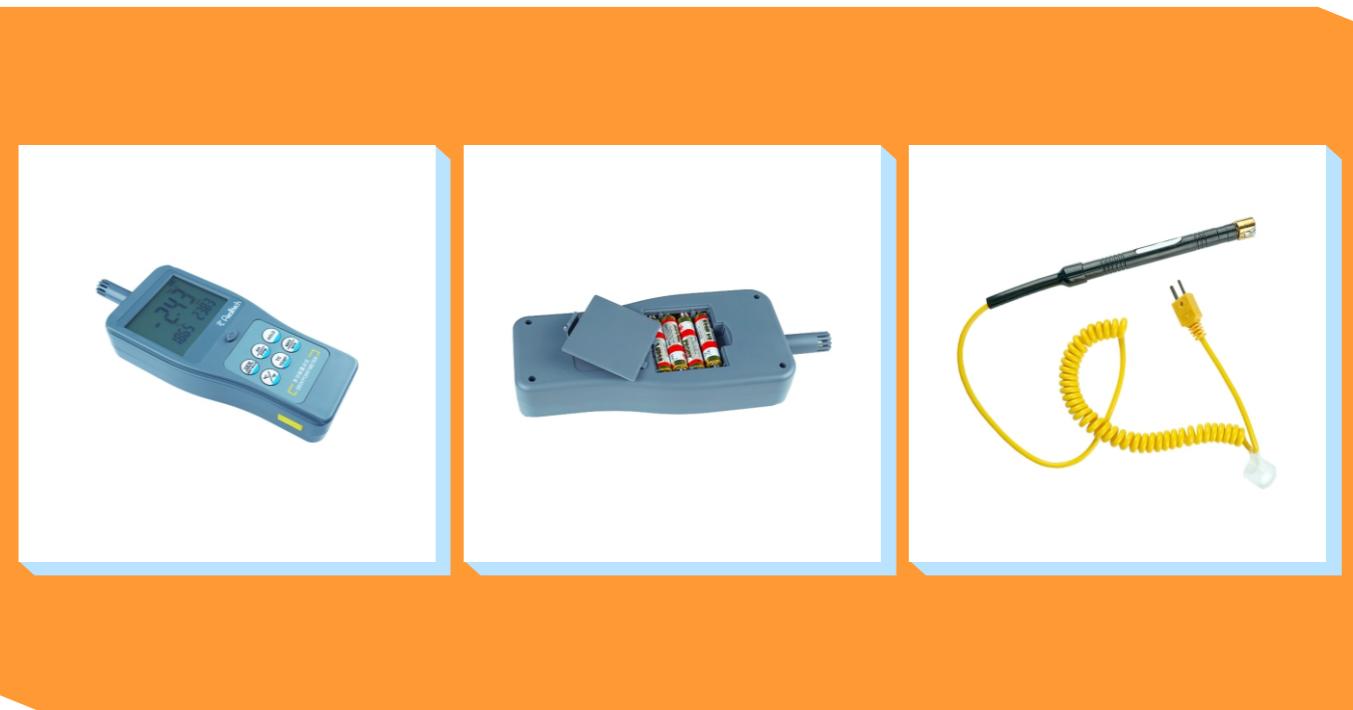

Model		RTM2612
Ambient Temperature	Range	-30~120°C (-22~248°F)
	Accuracy	±0.4°C (90~120°C) ±0.2°C (60~90°C) ±0.1°C (20~60°C) ±0.2°C (-30~20°C)
	Resolution	0.01 (<100) 0.1 (Other)
Relative Humidity	Range	0~100%RH
	Accuracy	±1.5%RH (0~80%RH) ±2%RH (80~100%RH)
	Resolution	0.01
Dew Point Temperature	Range	-45~120°C (-49~248°F)
	Resolution	0.01 (<100) 0.1 (Other)
Wet Bulb Temperature	Range	-20~40°C (-4~104°F)
	Resolution	0.01 (<100) 0.1 (Other)

Model		RTM2612
Absolute Humidity	Range	0~400g/m³
	Resolution	0.01 (<100) 0.1 (Other)
	PPM	0~50000 1
Surface Temperature	Sensor	K-type Thermocouple
	Range	-50~200°C (-58~392°F)
	Accuracy	±1°C or ±1% of reading (Take the larger value)
Operating Conditions	Resolution	0.1 (<100) 1 (Other)
	Temperature	0~50°C (32~122°F) Humidity: 0~80%RH (No Condensation)
	Storage Conditions	Temperature: -10~60°C (14~140°F) Humidity: 0~90%RH (No Condensation)
Power Supply	Size	4×1.5V AAA(UM-4) Battery 205×80×31mm